

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



PH100-11PXXXXXXX1

$$L=A+B+H$$



PH100-11RXXXXXXX1

$$L=A+B+D+H+0.75$$



PH100-11SXXXXXXX1


$$L=B+H+D+W/2$$





PH100-11SXXXXXXX2

$$L=B+H+D+W/2$$




Mating With/配對母座:

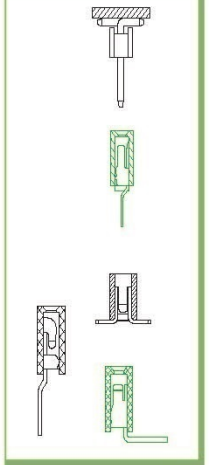

Dimension anithesees list				
ITEM	A	B		H
Standard	1.2	1.8		1.0
Alternate				1.5
				2.0

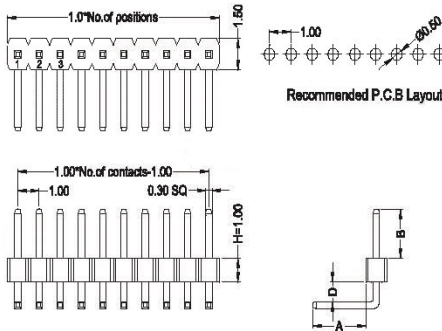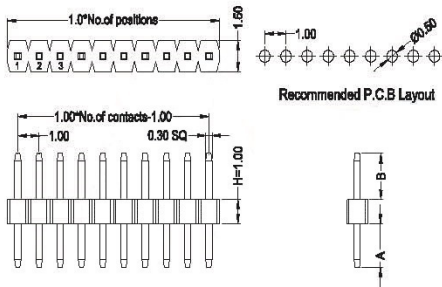

Dimension anithesees list:				
ITEM	A	B	D	H
Standard	2.5	1.8	0.8	1.0
Alternate				1.5
				2.0

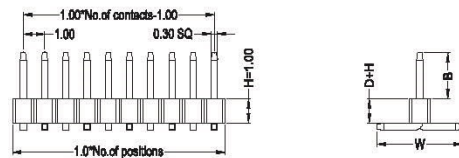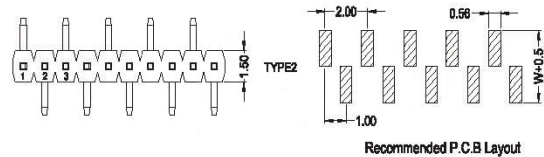

Dimension anithesees list				
ITEM	B	D	W	H
Standard	1.8	0	4.0	1.0
Alternate				1.5
				2.0

PH100-11

X

XX

XXX

XXXX

X

X

Contact Shape:
P: Straight
R: Right Angle
S: SMT

No. Of Pins Per Row
02~50P

Contact Plating
Full Of Gold
C0=0.8u"
~
C9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Length Of Terminal

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)