

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



PH127-23ZXXXXXXX1






$$L=B1+D1+D2+(N-1.27)/2-0.67$$




PH127-23ZXXXXXXX2

$$L=B1+D1+D2+(N-1.27)/2-0.67$$

Mating With/配對母座:

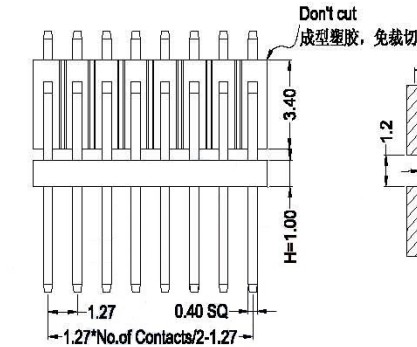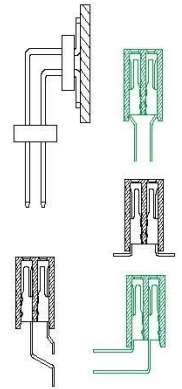

TYPE1



TYPE2

Dimension antitheses list						
ITEM	B	B1	D1	D2	W	H
Standard	1.8/3.0/4.0/6.0				5.50	0.8
Alternate						1.0

P

PIN HEADER

PH127-23

Z

XX

XX

XXX

X

X

No.Of Pins
Per Row
02~50P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Length Of
Terminal

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)