

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min



Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C

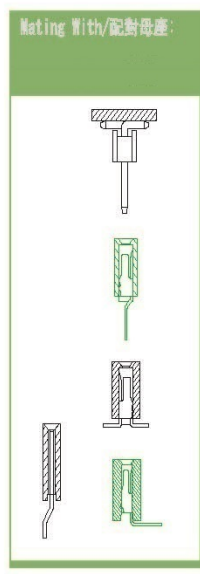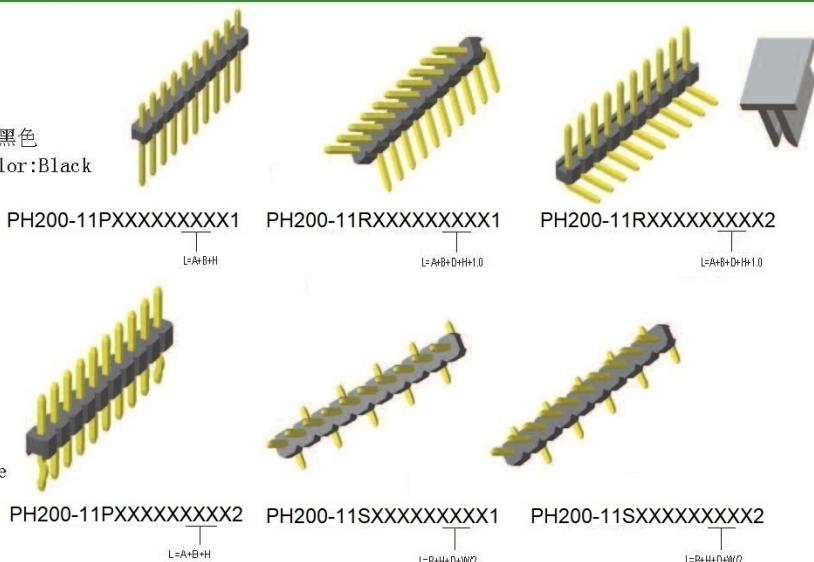


Dimension antitheses list				
ITEM	A	B	H	
Standard	2.80	2.0/3.0/4.0	1.0	2.0
Alternate			1.5	2.5

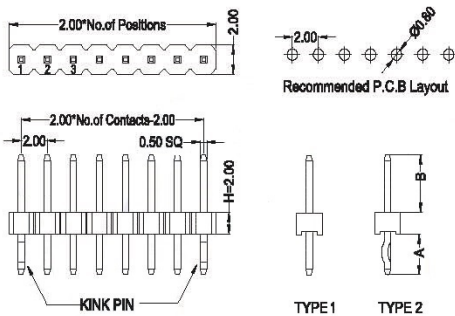


Dimension antitheses list					
ITEM	A	B	D	H	
Standard	2.80	2.0/3.0/4.0	0.75	1.0	2.0
Alternate				1.5	2.5

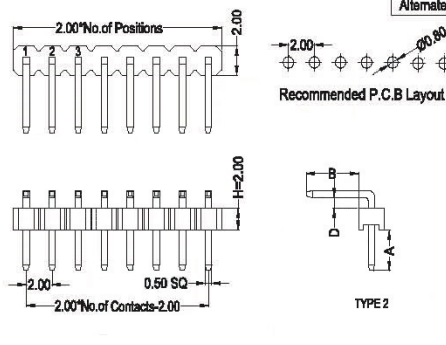

Dimension antitheses list				
ITEM	A	B	D	H
Standard	2.80	2.0/3.0/4.0	0.75	1.0 2.0
Alternate				1.5 2.5

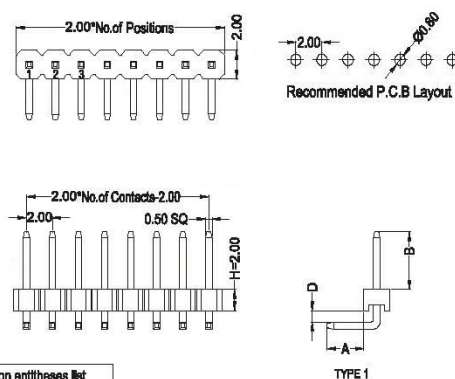

Dimension antitheses list				
ITEM	B	D	W	H
Standard	2.0/3.0/4.0	0.10	4.50	1.0 2.0
Alternate				1.5 2.5

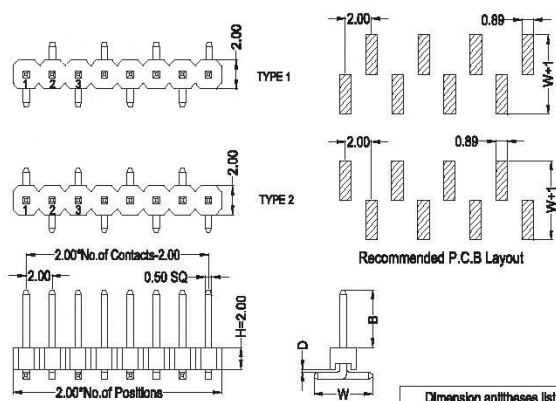

PIN HEADER

PH200-11

X

XX

XX

XXX

X

X

Contact Shape:
P: Straight
R: Right Angle
S: SMT

No. Of Pins Per Row
01~40P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Length Of Terminal

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)