

Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T/LCP+30%G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30%G.F UL94V-0, Color:Black

端子:黃銅

Contact:Brass

2. 特性(characteristics):

額定電流:2.0AMP

Rating Current:2.0AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min

Insulating Resistance:1000 MΩ Min

耐電壓:AC 500V/分鐘

Withstanding Voltage:AC 500V/Minute

溫度範圍:-40° C to+105° C

Temperature Range:-40° C to+105° C

PH200-21PXXXXXXXXX1




L=A+B+C

PH200-21PXXXXXXXXX2

L=A+B+C

PH200-21RXXXXXXXXX1

L=A+B+H+H2+2H+H0.25



PH200-21RXXXXXXXXX2

L=A+B+C+D+1.0


PH200-21SXXXXXXXXX1

L=B+C+D+W/2

PH200-21SXXXXXXXXX2









L=B+C+D+W/2

Mating With/配對母座:

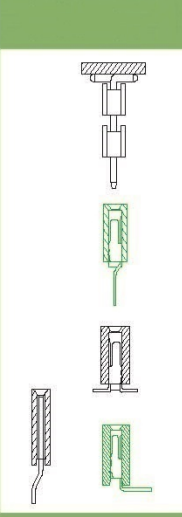

Dimension antitheses list				
ITEM	A	B	C	H
Standard	2.80	2.0/3.0/4.0		1.0 2.0 1.5 2.5
Alternate				

Dimension antitheses list					
ITEM	A	B	C	D	H
Standard	2.80	2.0/3.0/4.0		0.75	1.0 2.0 1.5 2.5
Alternate					

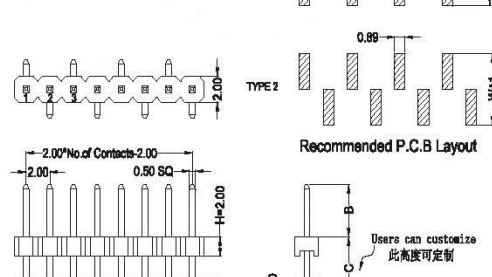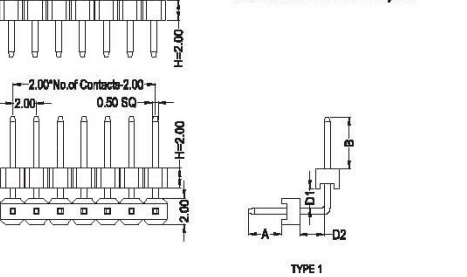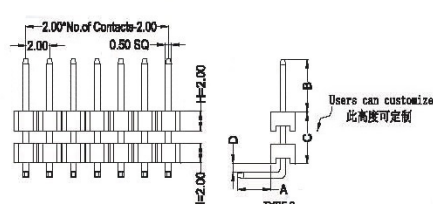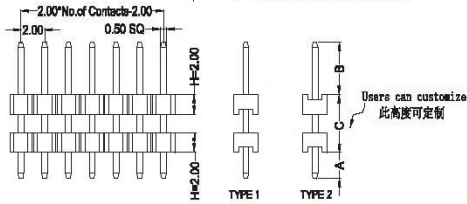

Dimension antitheses list					
ITEM	A	B	D1	D2	H
Standard	2.80	2.0/3.0/4.0			1.0 2.0 1.5 2.5
Alternate					

Dimension antitheses list					
ITEM	B	C	D	W	H
Standard	2.0/3.0/4.0		0.10	4.50	1.0 2.0 1.5 2.5
Alternate					

PH200-21

X

XX

XX

XXX

X

X

Contact Shape:
P: Straight
R: Right Angle
S: SMT

No. Of Pins Per Row
01~40P

Contact Plating
Full Of Gold
G0=0.8u"

G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Length Of Terminal

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)