

### Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black  
 端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min











Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperture Range: -40° C to +105° C

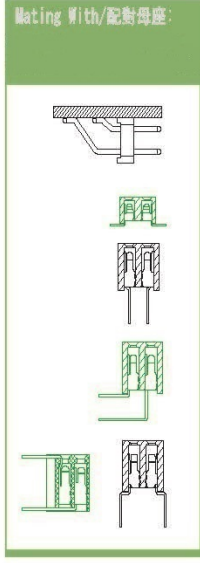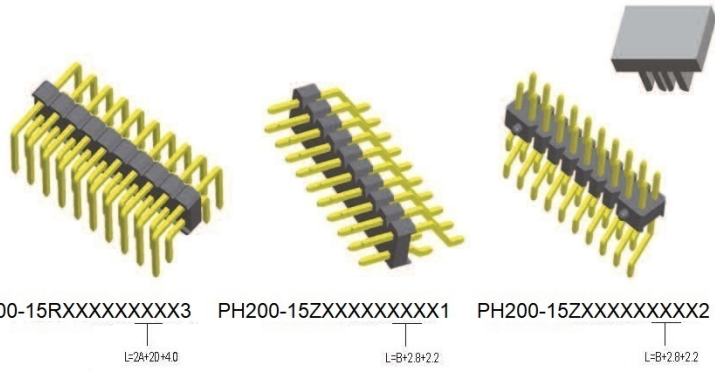

Dimension and tolerances list			
ITEM	A	W	D
Standard	2.8	4.0	0.75
Alternate			

Dimension and tolerances list	
ITEM	B
Standard	2.0/3.0/4.0
Alternate	

### PH200-15

X

XX

XX

XXX

X

X

**Contact Shape:**  
 R: Right Anglt  
 Z: 90° SMT

**No. Of Pins Per Row**  
 02~40P

**Contact Plating**  
 Full Of Gold  
 G0=0.8u"  
 G9=30u"  
 S1=Ordinary Tin Plated  
 S2=Matte Tin Plated  
 S3=Tin-plated High-temperature

**Length Of Terminal**

**Packing**  
 A: PE Bag  
 R: Tape & Reel  
 T: Tube  
 D: Tube+CAP  
 E: Tray

**Journal Number**  
 1: Type1 (without Post)  
 2: Type2 (with Post)  
 3: Type3