

Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T/LCP+30%G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30%G.F UL94V-0, Color:Black

端子:黃銅

Contact:Brass

2. 特性(characteristics):

額定電流:3.00AMP

Rating Current:3.00AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min

Insulating Resistance:1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage:AC 500V/Minute


溫度範圍: -40° C to+105° C

Temperature Range: -40° C to+105° C




PH154-13RXXXXXXX4

L=A+B+D+2.5+1.78



PH154-13ZXXXXXXX4




L=B+3.0+3.0





PH154-13ZXXXXXXX5

L=B+3.0+3.0

Mating With/配對母座:

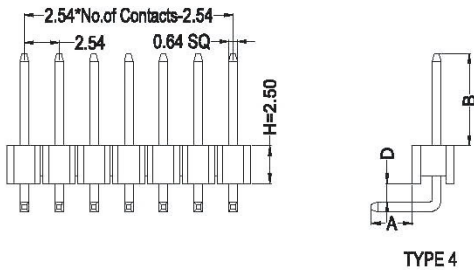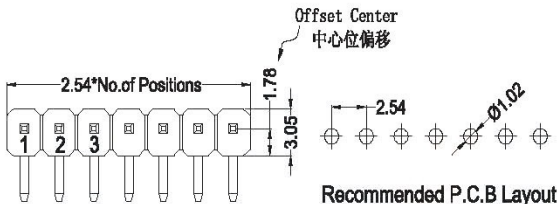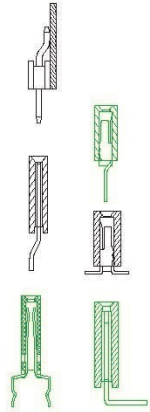

Dimension antitheses list			
ITEM	A	B	D
Standard	3.0	3.0/4.0/5.0/6.0	1.2
Alternate			

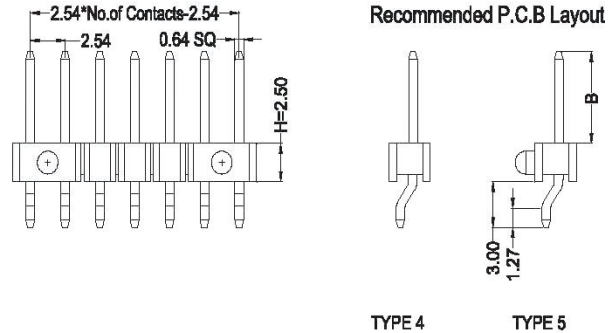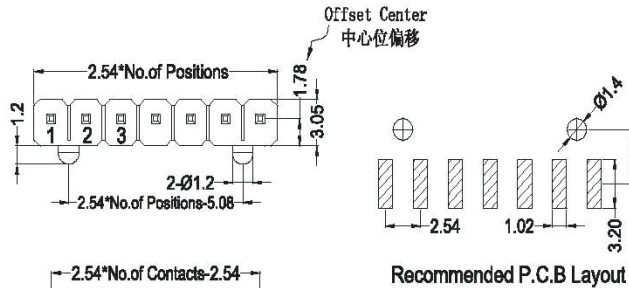

Dimension antitheses list	
ITEM	B
Standard	3.0/4.0/5.0/6.0
Alternate	

PIN HEADER

PH154-13

X

Contact Shape:
R:Right Angle
Z:90° SMT

XX

No.Of Pins Per Row
01~40P

XX

Contact Plating

Full Of Gold

G0=0.8u"

~

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

XXX

Length Of Terminal

X

Packing

A:PE Bag

R:Tape & Reel

T:Tube

D:Tube+CAP

E:Tray

X

Journal Number

4:Type4

5:Type5