

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




PH254-23PXXXXXXX1

L=A+B+C




PH254-23RXXXXXXX1

L=A+B+C+D+1.23



PH254-23SXXXXXXX1


L=B+C+D*(W2.54)







PH254-23SXXXXXXX2

L=B+C+D*(W2.54)


Mating With/配對母座:

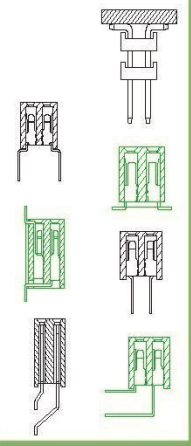

Dimension anithesea list			
ITEM	A	B	C
Standard	3.00	3.0/4.0/5.0/6.0	
Alternate			

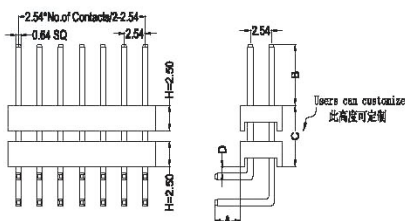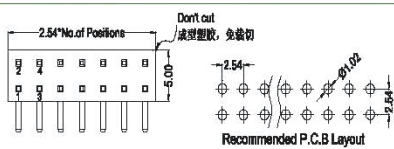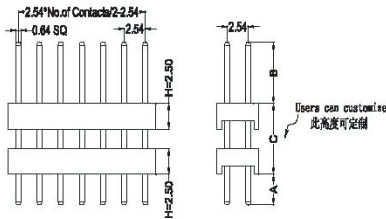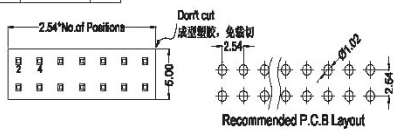

Dimension anithesea list				
ITEM	A	B	C	D
Standard	3.00	3.0/4.0/5.0/6.0		1.20
Alternate				

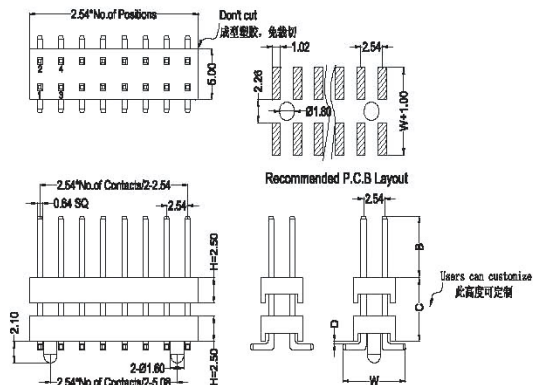

Dimension anithesea list				
ITEM	B	C	D	W
Standard	3.0/4.0/5.0/6.0		0.20/0.80	7.50
Alternate				

PIN HEADER

PH254-23

X

XX

XX

XXX

X

X

Contact Shape:
P: Straight
R: Right Angle
S: SMT

No. Of Pins Per Row
02~40P

Contact Plating

Full Of Gold

C0=0.8u"

~

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Length Of Terminal

Packing

A: PE Bag

R: Tape & Reel

T: Tube

D: Tube+CAP

E: Tray

Journal Number

1: Type1 (without Post)

2: Type2 (with Post)