

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 7.0AMP

Rating Current: 7.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C

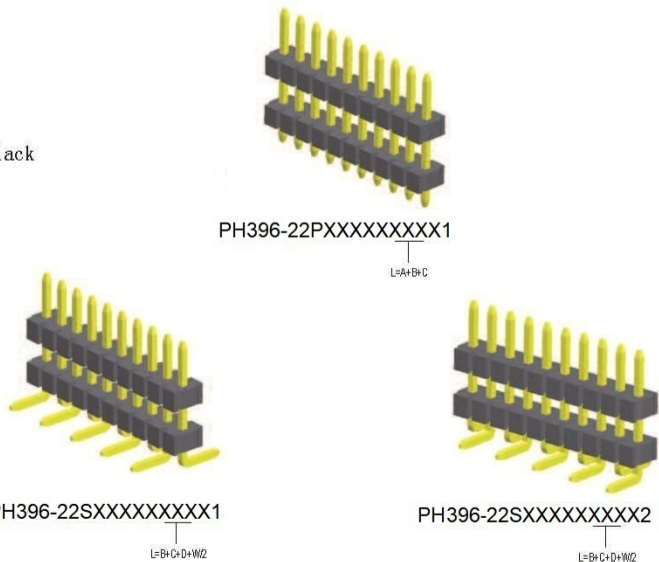


Mating With/配對母座:

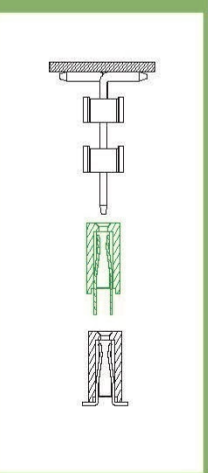

PIN HEADER

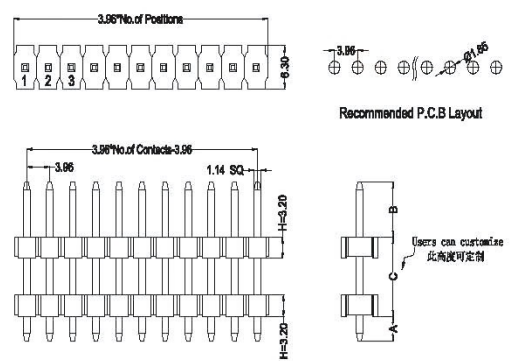

ITEM	A	B	C
Standard	3.50	8.00	
Alternate			

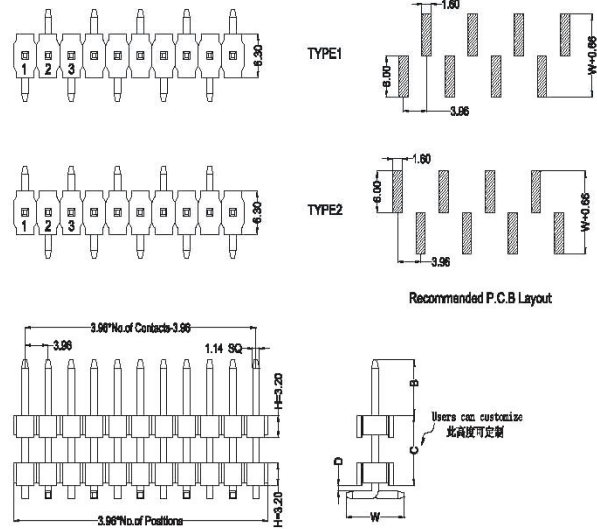

ITEM	B	C	D	W
Standard	8.00		0.85	10.0
Alternate				

PH396-22	X	XX	XX	XXX	X	X
	Contact Shape: P: Straight S: SMT	No. Of Pins Per Row: 02~30P	Contact Plating: Full Of Gold G0=0.8u" ~ G9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Length Of Terminal	Packing: A: PE Bag R: Tape & Reel T: Tube D: Tube+CAP E: Tray	Journal Number: 1: Type1 (without Post) 2: Type2 (with Post)