

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 7.0AMP

Rating Current: 7.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘

Withstanding Voltage: AC 500V/Minute


溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




PH508-22PXXXXXXX1

L=A+B+C



PH508-22SXXXXXXX1


L=B+C+D+W/2




PH508-22SXXXXXXX2

L=B+C+D+W/2



Mating With/配對母座:

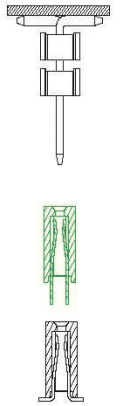

PIN HEADER




Recommended P.C.B Layout





Users can customize
此高度可定制


Dimension antitheses list			
ITEM	A	B	C
Standard	3.50	8.00	
Alternate			





TYPE 1



TYPE 2



Recommended P.C.B Layout



Users can customize
此高度可定制

Dimension antitheses list				
ITEM	B	D	C	W
Standard	8.00	0.45		10.0
Alternate				

PH508-22

X

Contact Shape:
P: Straight
S: SMT

XX

No. Of Pins Per Row
02~20P

XX

Contact Plating
Full Of Gold
C0=0.8u"
~
C9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

XXX

Length Of Terminal

X

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

X

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)