

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C



BF227-12PXXX210X1



BF227-12SXXX210X1










BF227-12SXXX210X2







BF227-12SXXX210X3



Mating With/配對公座:

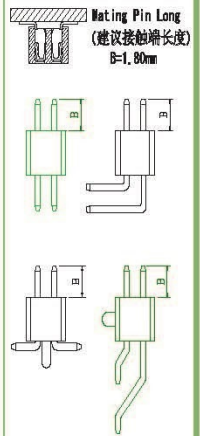

Recommended P.C.B Layout



TYPE1 TYPE2



TYPE3

FEMALE HEADER

BF227-12

X

XX

XX

210

X

X

Contact Shape:
P: Straight
S: SMT

No. Of Pins Per Row:
02~50P

Contact Plating:
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing:
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number:
1: Type1 (without Post)
2: Type2 (with Post)
3: Type3