

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C




BF227-16PXXX430X1



BF227-16PXXX430X2






BF227-16CXXX430X1





BF227-16RXXX430X1



Mating With/配對公座:

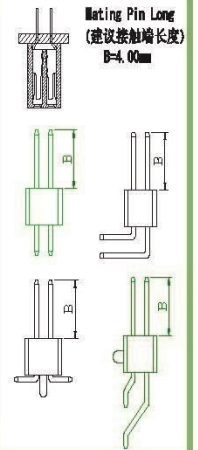





Recommended P.C.B Layout





TYPE 1





Recommended P.C.B Layout





Recommended P.C.B Layout



TYPE 2



Recommended P.C.B Layout



BF227-16

X

XX

XX

430

X

X

Contact Shape:

P: Straight  
R: Right Angle  
C: Splint

No. Of Pins Per Row

02~50P

Contact Plating

Full Of Gold  
G0=0.8u"  
G9=30u"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

Packing

A: PE Bag  
R: Tape & Reel  
T: Tube  
D: Tube+CAP  
E: Tray

Journal Number

1: Type1 (without Post)  
2: Type2 (with Post)