

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0,

Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 1.0AMP

Rating Current: 1.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C



BF227-18PXXXX340X3  
BF227-18PXXXX430X3




BF227-18SXXXX340X5  
BF227-18SXXXX430X5












BF227-18SXXXX340X6  
BF227-18SXXXX430X6

Mating With/配對公座:

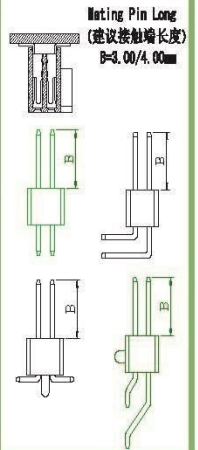

FEMALE HEADER



BF227-18

X

XX

XX

340

430

X

X

Contact Shape:  
P: Straight  
S: SMT

No. Of Pins  
Per Row  
02~50P

Contact Plating

Full Of Gold

G0=0.8u"

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Packing

A: PE Bag

R: Tape & Reel

T: Tube

D: Tube+CAP

E: Tray

Journal Number

3: Type3

5: Type5

6: Type6