

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min

Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C




BF200-18ZXXXX400X1
BF200-18ZXXXX430X1
BF200-18ZXXXX460X1




BF200-18ZXXXX400X2
BF200-18ZXXXX430X2
BF200-18ZXXXX460X2



BF200-18WXXXX400X1
BF200-18WXXXX430X1
BF200-18WXXXX460X1





BF200-18WXXXX400X2
BF200-18WXXXX430X2
BF200-18WXXXX460X2




BF200-18WXXXX400X3
BF200-18WXXXX430X3
BF200-18WXXXX460X3


Mating With/配對公座:

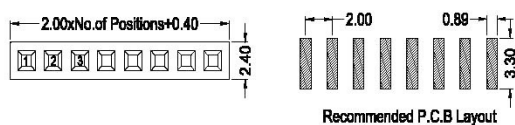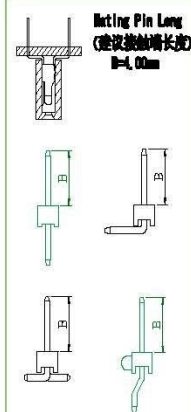


Recommended P.C.B Layout

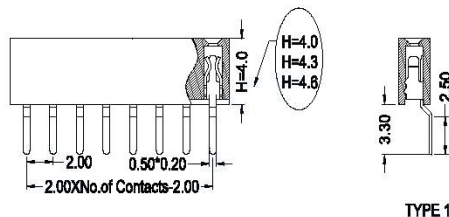


TYPE 1




Recommended P.C.B Layout

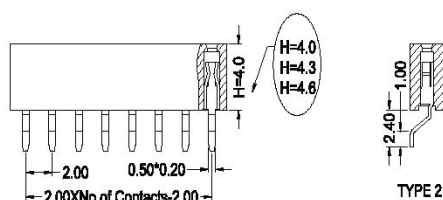


TYPE 2




TYPE 1




TYPE 2



TYPE 1




TYPE 2



Recommended P.C.B Layout



Recommended P.C.B Layout



TYPE 3

BF200-18

X

XX

XX

400

430

460

X

X

Contact Shape:
W: Bottom Entry
Z: 90° SMT

No. Of Pins
Per Row
02~40P

Contact Plating
Full Of Gold
G0=0.8u"

G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature sture

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)
3: Type3