

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C



BF200-25PXXXX355X1






BF200-25SXXXX355X1





BF200-25SXXXX355X2





Mating With/配對公差:

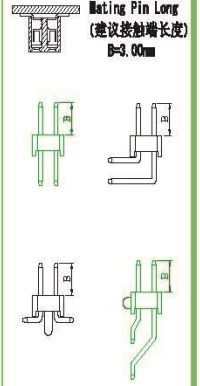

Recommended P.C.B Layout



Recommended P.C.B Layout



TYPE1

TYPE2

FEMALE HEADER

BF200-25

X

XX

XX

355

X

X

Contact Shape:

P: Straight
S: SMT

No. Of Pins Per Row

02~40P

Contact Plating

Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing

A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number

1: Type1 (without Post)
2: Type2 (with Post)