

### Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C


Temperature Range: -55° C to +125° C



BF200-26PXXXX400X1  
BF200-26PXXXX430X1  
BF200-26PXXXX460X1




BF200-26PXXXX400X2  
BF200-26PXXXX430X2  
BF200-26PXXXX460X2







BF200-26CXXXX400X1  
BF200-26CXXXX430X1  
BF200-26CXXXX460X1

Mating With/配對公差:

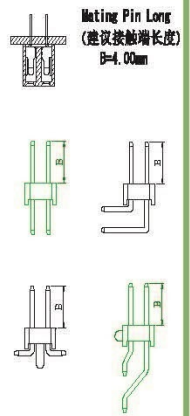

FEMALE HEADER

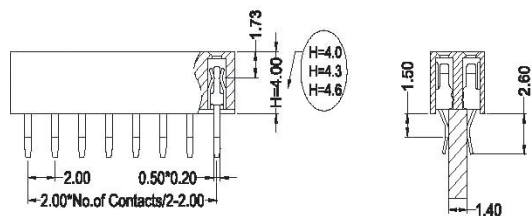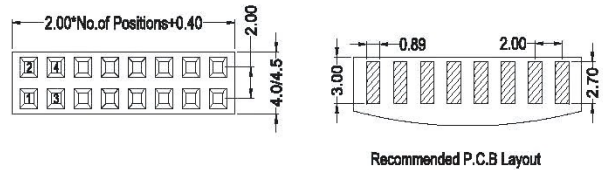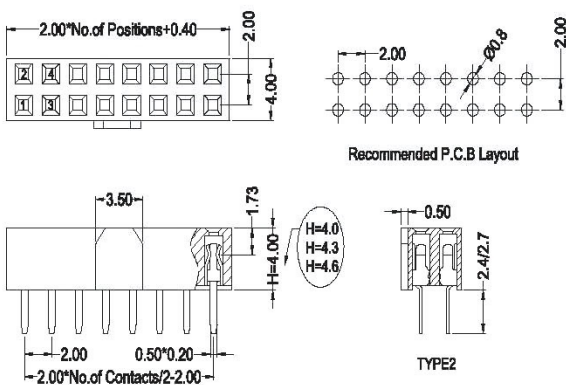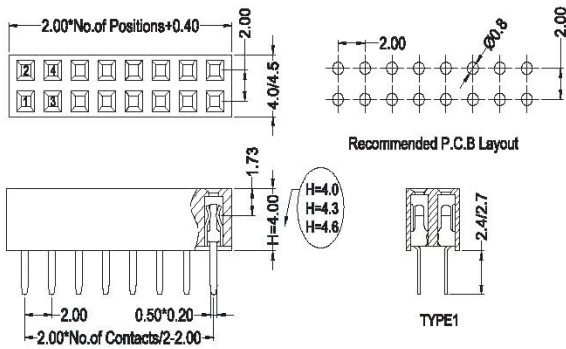

BF200-26

X

XX

XX

400

430

460

X

X

X

**Contact Shape:**  
P: Straight  
C: Splint

**No. Of Pins Per Row:**  
02~40P

**Contact Plating:**  
Full Of Gold  
G0=0.8u"

~  
C9=30u"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

**Packing:**  
A: PE Bag  
R: Tape & Reel  
T: Tube  
D: Tube+CAP  
E: Tray

**Journal Number:**  
1: Type1 (without Post)  
2: Type2 (with Post)

**Width Number:**  
A: 4.00mm  
B: 4.50mm