

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30% G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30% G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -55° C to +125° C

Temperature Range: -55° C to +125° C




BF200-28WXXXX400X1
BF200-28WXXXX430X1
BF200-28WXXXX460X1





BF200-28WXXXX400X2
BF200-28WXXXX430X2
BF200-28WXXXX460X2

Mating With/配對公座:

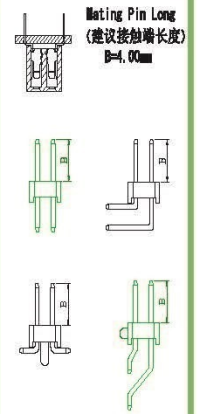

FEMALE HEADER

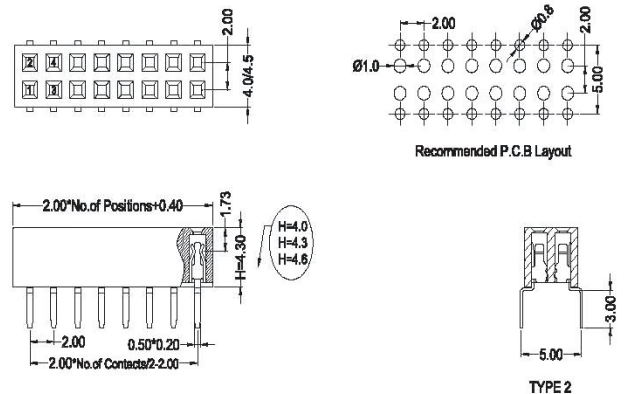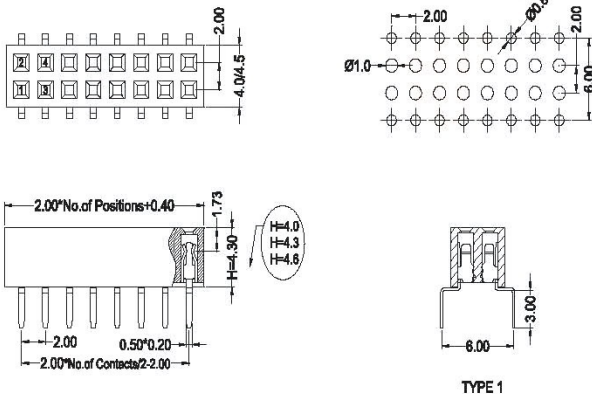

Recommended P.C.B Layout

BF200-28

W

XX

XX

400

430

460

X

X

X

Contact Shape:
W: Bottom Entry

No. Of Pins
Per Row
02~40P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)

Width
Number
A: 4.00mm
B: 4.50mm