

Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T/LCP+30% G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30% G.F UL94V-0, Color:Black

端子:磷銅

Contact:Phosphor Bronze

2. 特性(characteristics):

額定電流:2.0AMP

Rating Current:2.0AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min


Insulating Resistance:1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage:AC 500V/Minute

溫度範圍: -55° C to+125° C

Temperature Range: -55° C to+125° C


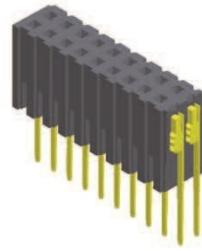


BF200-2CPXXX720X1




BF200-2CRXXX720X1



Mating With/配對公座:

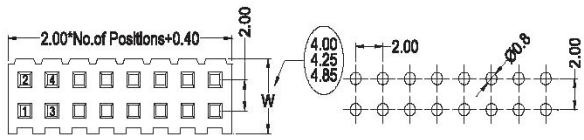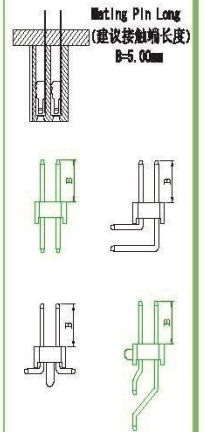

Recommended P.C.B Layout

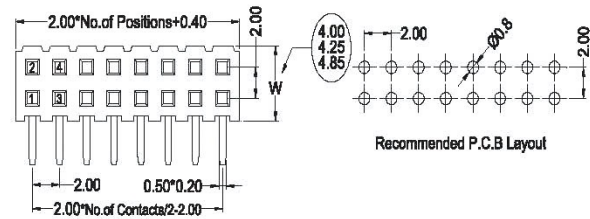

Recommended P.C.B Layout

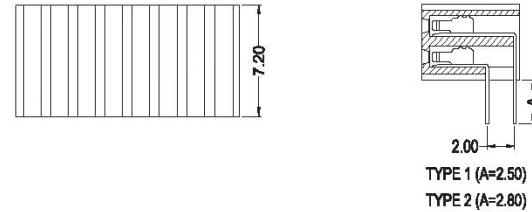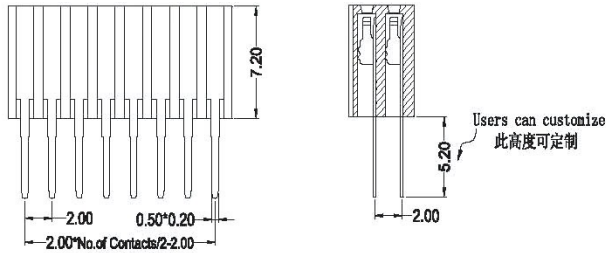

TYPE 1 (A=2.50)
TYPE 2 (A=2.80)

FEMALE HEADER

BF200-2C

X

XX

XX

720

X

X

X

Contact Shape:
P: Straight
R: Right Angle

No.Of Pins Per Row
02~40P

Contact Plating
Full Of Gold
C0=0.8u"
~
C9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)

Width Number
A: 4.00mm
B: 4.25mm
C: 4.85mm