

Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T/LCP+30% G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30% G.F UL94V-0, Color:Black

端子:磷銅

Contact:Phosphor Bronze

2. 特性(characteristics):

額定電流:3.0AMP

Rating Current:3.0AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min

Insulating Resistance:1000 MΩ Min

耐電壓: AC 1000V/分钟

Withstanding Voltage:AC 1000V/Minute

溫度範圍: -40° C to+105° C

Temperature Range: -40° C to+105° C








BF254-11RXXX340X1



BF254-11SXXX340X1

Mating With/配對公座:

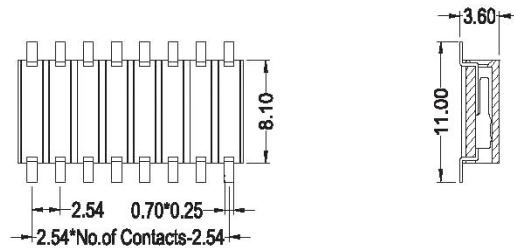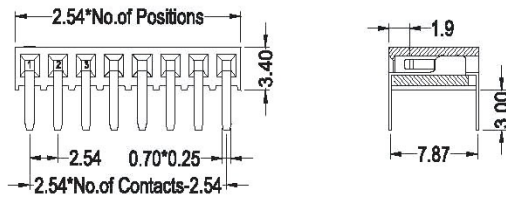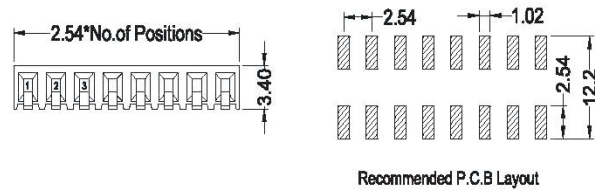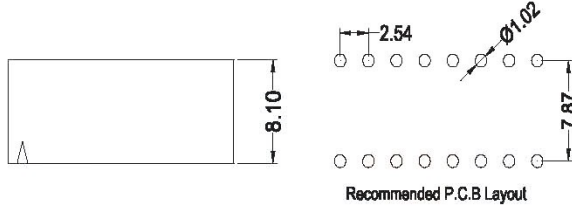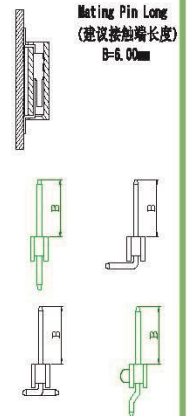

FEMALE HEADER

BF254-11

X

XX

XX

340

X

1

Contact Shape:
R:Right Angle
S:SMT

No.Of Pins Per Row
02~40P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing
A:PE Bag
R:Tape & Reel
T:Tube
D:Tube+CAP
E:Tray