

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T /LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 1000V/分钟

Withstanding Voltage: AC 1000V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




BF254-13PXXXX350X1




BF254-13SXXXX350X1



BF254-13SXXXX350X2








BF254-13WXXXX350X1





BF254-13WXXXX350X2


Mating With/配對公座:

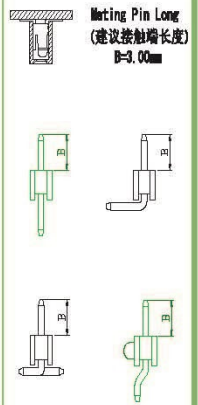



TYPE1





TYPE2




Recommended P.C.B Layout





TYPE1



TYPE2



Recommended P.C.B Layout



BF254-13

X

XX

XX

350

X

X

Contact Shape:
P: Straight
S: SMT
W: Bottom Entry

No. Of Pins Per Row
02~40P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)