

Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T /LCP+30%G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30%G.F UL94V-0, Color:Black

端子:磷銅

Contact:Phosphor Bronze

2. 特性(characteristics):

額定電流:3.00AMP

Rating Current:3.00AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min


Insulating Resistance:1000 MΩ Min

耐電壓: AC 1000V/分钟


Withstanding Voltage:AC 1000V/Minute

溫度範圍: -40° C to+105° C


Temperature Range: -40° C to+105° C




BF254-16PXXX500X1



BF254-16RXXX500X1




BF254-16SXXX500X1




BF254-16SXXX500X1



Mating With/配對公差:

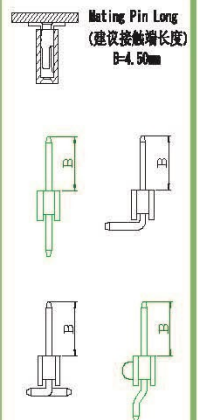



FEMALE HEADER




Recommended P.C.B Layout

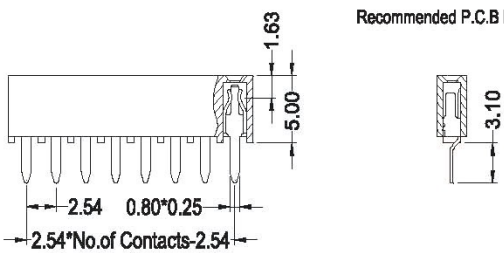

Recommended P.C.B Layout


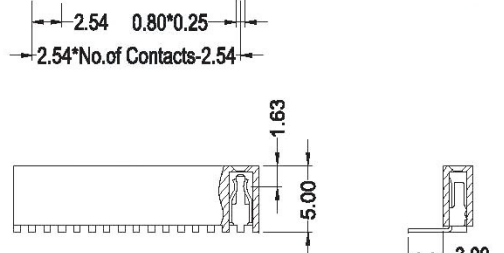


TYPE1



TYPE2

Recommended P.C.B Layout



BF254-16

X

XX

XX

500

X

X

Contact Shape:
P: Straight
R: Right Angle
S: SMT

No.Of Pins Per Row
02~40P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)