

### Specifications

備注(Remark)

1. 材料(Material)

膠芯:PA9T /LCP+30%G.F UL94V-0, 顏色:黑色

Housing:PA9T/LCP+30%G.F UL94V-0, Color:Black

端子:磷銅

Contact:Phosphor Bronze

2. 特性(characteristics):

額定電流:3.00AMP

Rating Current:3.00AMP

接觸阻抗:20mΩ Max

Contact Resistance:20mΩ Max

絕緣阻抗:1000MΩ Min


Insulating Resistance:1000 MΩ Min

耐電壓: AC 1000V/分钟

Withstanding Voltage:AC 1000V/Minute

溫度範圍: -40° C to+105° C

Temperature Range: -40° C to+105° C



BF254-1CPXXX850X1




BF254-1CSXXX850X1











BF254-1CSXXX850X2


Mating With/配對公座:

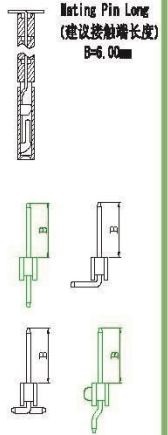

FEMALE HEADER



Recommended P.C.B Layout



**BF254-1C**

**X**

**XX**

**XX**

**850**

**X**

**X**

**Contact Shape:**  
P: Straight  
S: SMT

**No. Of Pins Per Row**  
02~40P

**Contact Plating**  
Full Of Gold  
G0=0.8u"  
~  
G9=30u"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

**Packing**  
A: PE Bag  
R: Tape & Reel  
T: Tube  
D: Tube+CAP  
E: Tray

**Journal Number**  
1: Type1 (without Post)  
2: Type2 (with Post)