

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 5000MΩ Min


Insulating Resistance: 5000 MΩ Min

耐電壓: AC 1000V/分钟


Withstanding Voltage: AC 1000V/Minute

溫度範圍: -55° C to +105° C


Temperature Range: -55° C to +105° C




BF254-2H10420XX110X1



BF254-2H10420XX110X2







BF254-2H10432XX110X1



BF254-2H10432XX110X2

FEMALE HEADER

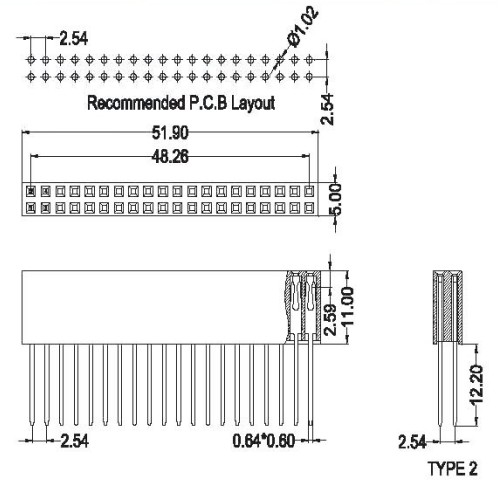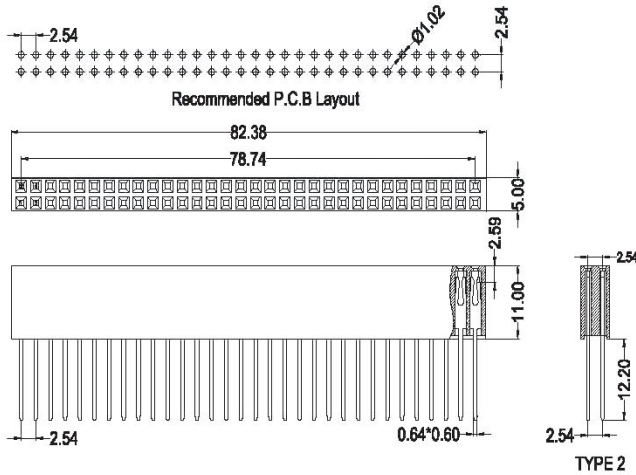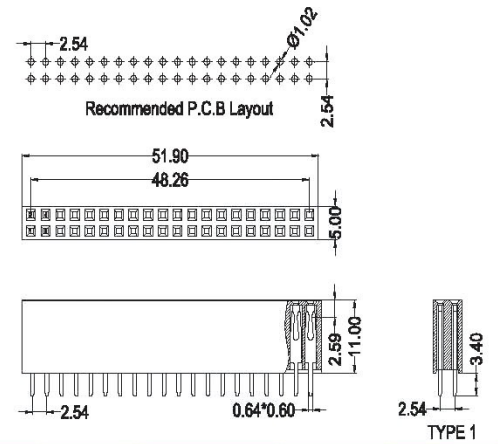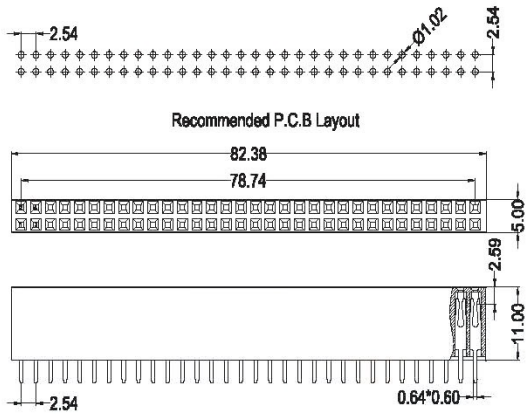

**BF254-2H104**

**XX**

**XX**

**110**

**X**

**X**

**No.Of Pins Per Row**  
20:20P  
32:32P

**Contact Plating**  
Full Of Gold  
G0=0.8u"  
~  
G9=30u"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

**Packing**  
A:PE Bag  
R:Tape & Reel  
T:Tube  
D:Tube+CAP  
E:Tray

**Journal Number**  
1:Type1 (without Post)  
2:Type2 (with Post)