

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 5000MΩ Min

Insulating Resistance: 5000 MΩ Min


耐電壓: AC 1000V/分钟

Withstanding Voltage: AC 1000V/Minute


溫度範圍: -55° C to +105° C

Temperature Range: -55° C to +105° C

BF254-2J10432XX110X1


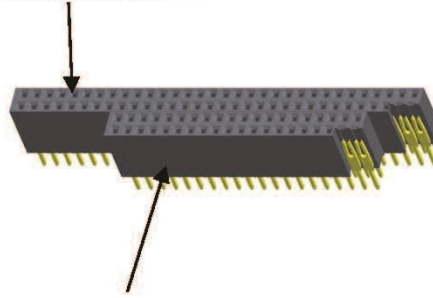


BF254-2J10432XX110X2

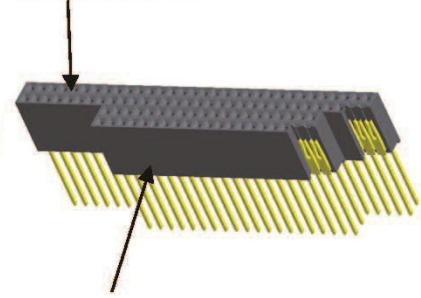

BF254-2J10420XX110X1

BF254-2J10420XX110X2

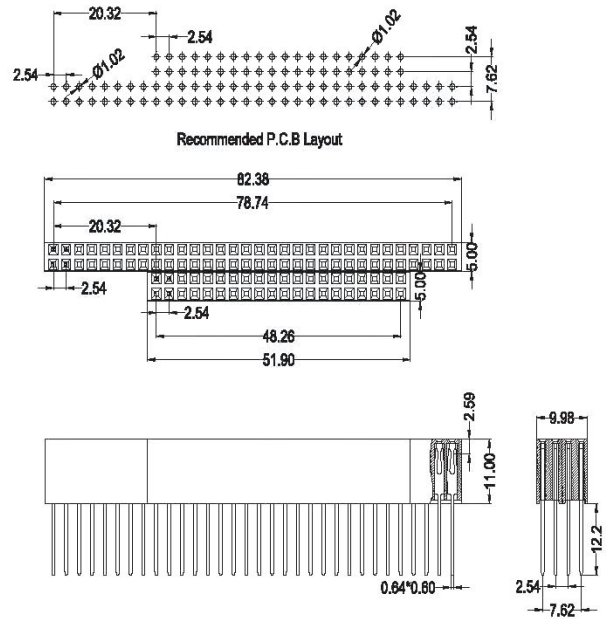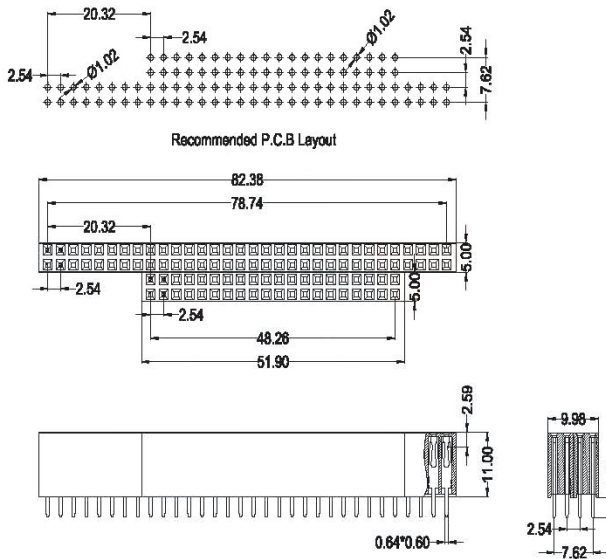

FEMALE HEADER

BF254-2J104

XX

XX

110

X

X

No. Of Pins Per Row

20:20P
32:32P

Contact Plating

Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Packing

A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number

1: Type1 (without Post)
2: Type2 (with Post)