

### Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 7.00AMP

Rating Current: 7.00AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 1000V/分鐘


Withstanding Voltage: AC 1000V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C






BF508-11PXXXX890X1



BF508-11SXXXX890X1

Mating With/配對公座:  
P825/P830/P832/P835

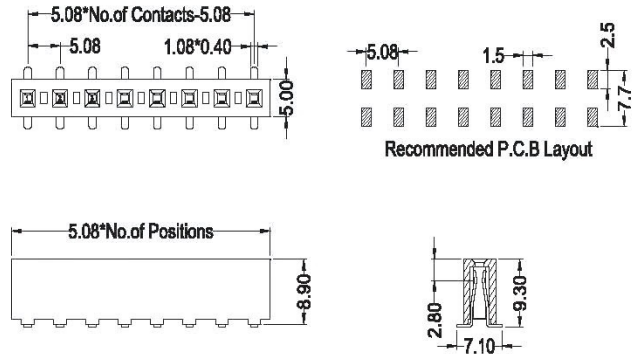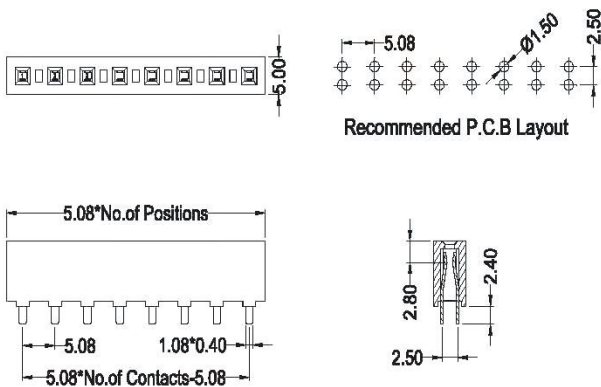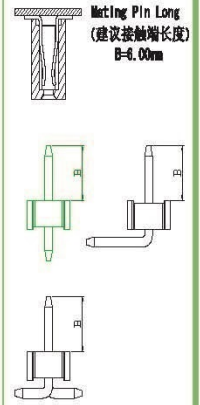

BF508-11

X

XX

XX

890

X

1

**Contact Shape:**  
P: Straight  
S: SMT

**No. Of Pins Per Row**  
02~20P

**Contact Plating**

Full Of Gold  
G0=0.8u"

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

**Packing**

A: PE Bag

R: Tape & Reel

T: Tube

D: Tube+CAP

E: Tray