

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: LCP UL94V-0

Housing: LCP UL94V-0

端子: 磷銅

Contact: Phosphor Brass

2. 特性 (characteristics):

額定電流: 0.50AMP

Rating Current: 0.50AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 500MΩ Min


Insulating Resistance: 500 MΩ MIN

耐電壓: AC 200V


Withstanding Voltage AC 200V/Minute

溫度範圍: -25° C to + 85° C




Temperature Range: -25° C to + 85° C






BTB8000-MXXXSXXXXXXXXX1



BTB8000-FXXXSXXXXXXXXX1

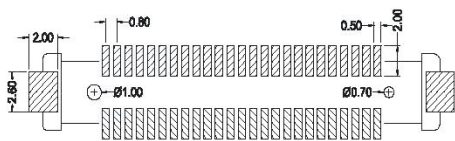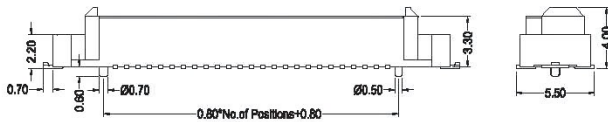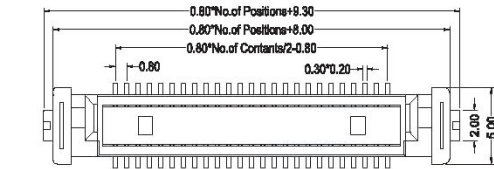

Recommended P.C.B Layout

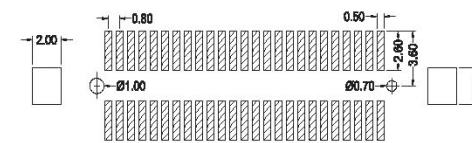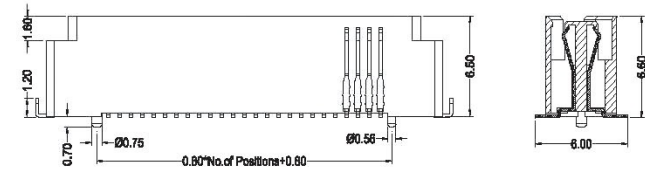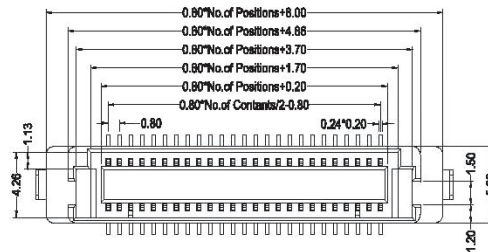

Recommended P.C.B Layout

BTB CONNECTOR

BTB8000-X

Type
F: Female
M: Male

XXX

No. Of Pins Per Row
10~80P

S

XXX

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

XX

Insulator Material:
A: PBT
B: PA6T
C: PA9T
D: LCP

X

Colour
W: White
P: Beige
B: Black
G: Grey427
E: Grey413
U: Blue
Y: Yellow

X

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

1