Specifications

備注(Remark)
1.材料(Material)
膠芯:LCP UL94V-0
Housing:LCP UL94V-0
端子:磷銅
Contact:Phosphor Brass
2.特性(characteristics):
額定電流:0.50AMP
Rating Current:0.50AMP
接觸阻抗:30mΩ Max
Contact Resistance:30mΩ Max
絕緣阻抗:500MΩ Min
Insulating Resistance:500 MΩ MIN
耐電壓: AC 200V
Withstanding Voltage:AC 200V/Minute
溫度範圍: -25° C to+ 85° C
Temperture Range: -25° C to+ 85° C

BTB8001-MXXXSXXXXXXXX1

BTB8001-FXXXSXXXXXXXX1

BTB CONNECTOR

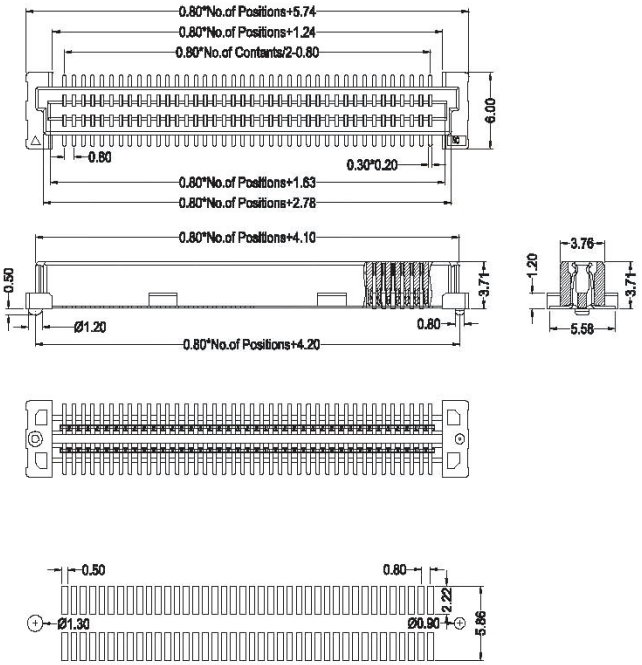

Recommended P.C.B Layout

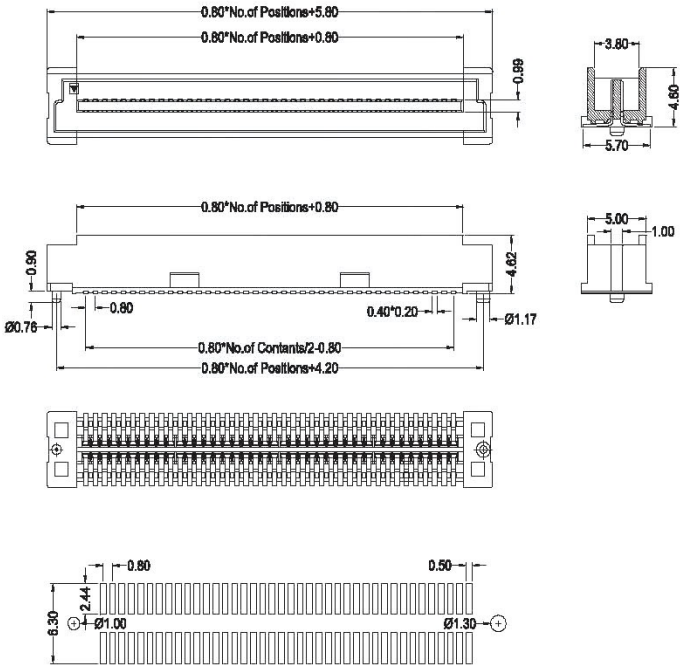

Recommended P.C.B Layout

BTB8001-X	XXX	S	XXX	XX	X	X	X	1
Type F:Female M:Male	**No.Of Pins Per Row** 10~80P			**Contact Plating** Full Of Gold G0=0.8u" ~ G9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	**Insulator Material:** A:PBT B:PA6T C:PA9T D:LCP	**Colour** W:White P:Beige B:Black G:Grey427 E:Grey413 U:Blue Y:Yellow	**Packing** A:PE Bag R:Tape & Reel T:Tube D:Tube+CAP E:Tray	