

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA46 UL94V-0

Housing: LCP UL94V-0

端子: 磷銅

Contact: Phosphor Brass

2. 特性 (characteristics):

額定電流: 0.50AMP

Rating Current: 0.50AMP

接觸阻抗: 30mΩ Max

Contact Resistance: 30mΩ Max

絕緣阻抗: 500MΩ Min

Insulating Resistance: 500 MΩ MIN

耐電壓: AC 200V

Withstanding Voltage: AC 200V/Minute

溫度範圍: -25° C to + 85° C








Temperature Range: -25° C to + 85° C




BTB1000-MXXXXSXXXXXXXX1



BTB1000-FXXXXSXXXXXXXX1

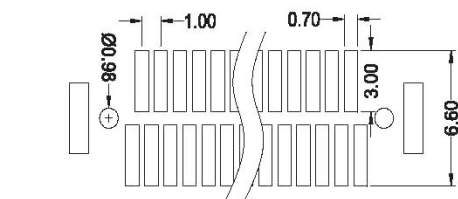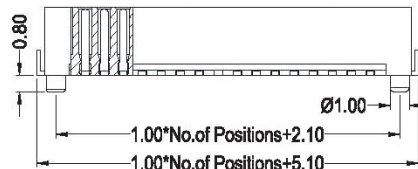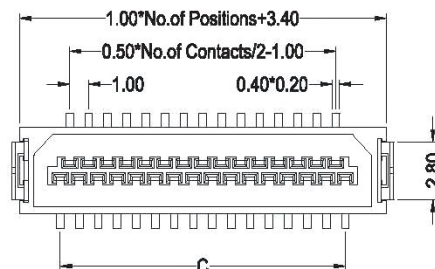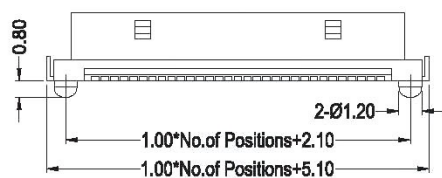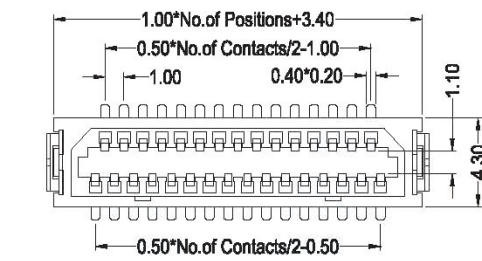

Recommended P.C.B Layout

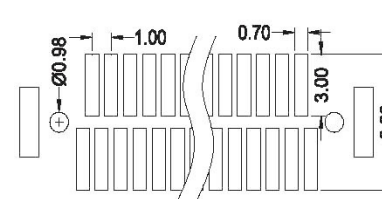

Recommended P.C.B Layout

BTB CONNECTOR

BTB1000-X

XXX

S

XXX

XX

X

X

X

1

Type
F: Female
M: Male

No. Of Pins Per Row
10~80P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
A: PBT
B: PA6T
C: PA9T
D: LCP
F: PA46

Colour
W: White
P: Beige
B: Black
G: Grey427
E: Grey413
U: Blue
Y: Yellow

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray