

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T /LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




B100-24XXXXXXX1







B100-24XXXXXXX2

Mating With/配對母座:

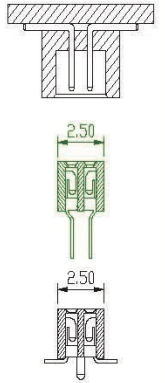

BOX HEADER B



B100-24

XX

XX

X

X

X

X

No. Of Pins
04~100P

Contact Plating
Full Of Gold
G0=0.8u"
~

G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Material:
B:PA6T
C:PA9T
D:LCP

Insulator Colour
B:Black
G:Grey

Packing
A:PE Bag
R:Tape & Reel
T:Tube
D:Tube+CAP
E:Tray

Journal Number
1:Type1 (without Post)
2:Type2 (with Post)