

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T /LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 0.75AMP

Rating Current: 0.75AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C






B100-25XXXXXXX1





B100-25XXXXXXX2



Mating With/配對母座:



Recommended P.C.B Layout

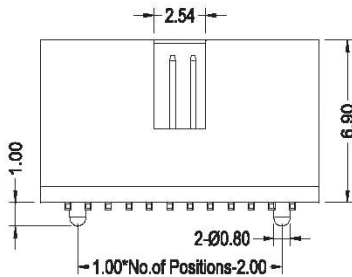

TYPE 1

TYPE 2

BOX HEADER B

B100-25

XX

XX

X

X

X

X

No. Of Pins
04~100P

Contact Plating

Full Of Gold

G0=0.8u"

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Insulator Material:

B:PA6T

C:PA9T

D:LCP

Insulator Colour

B:Black

G:Grey

Packing

A:PE Bag

R:Tape & Reel

T:Tube

D:Tube+CAP

E:Tray

Journal Number

1:Type1 (without Post)

2:Type2 (with Post)