

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.00AMP

Rating Current: 1.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C



B127-23PXXXXXX1








B127-23SXXXXXX1



B127-23SXXXXXX2

Mating With/配對母座:

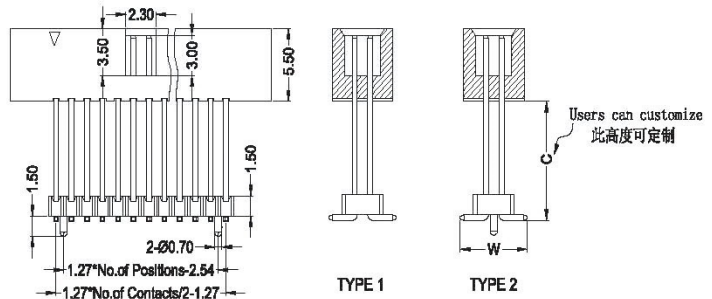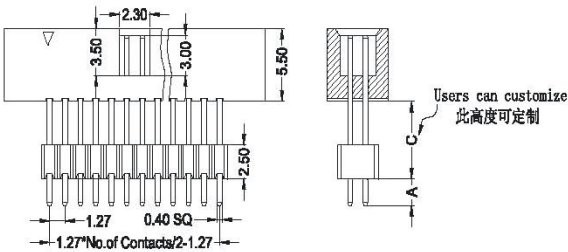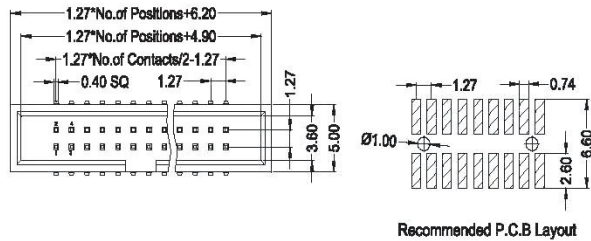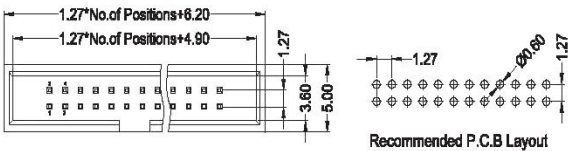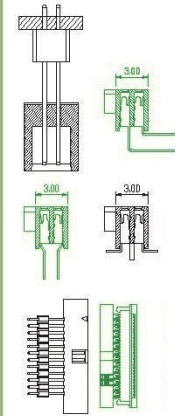

Dimension antitheses list		
ITEM	Dim A	Dim C
Standard	2.40	
Alternate		

Dimension antitheses list		
ITEM	Dim C	Dim W
Standard		5.50
Alternate		

B 1 2 7 - 2 3

X

XX

XX

X

X

X

Contact Shape:

P: Straight
S: SMT

No. Of Pins

04~100P

Contact Plating

Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Colour

B: Black
G: Grey

Packing

A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

Journal Number

1: Type1 (without Post)
2: Type2 (with Post)