

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 1.00AMP

Rating Current: 1.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C




B127-29PXXXXXX1





B127-29SXXXXXX1



Mating With/配對母座:

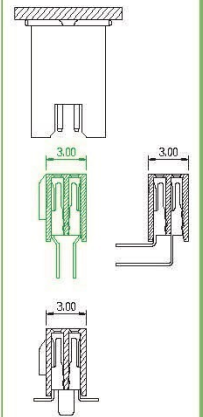

BOX HEADER B

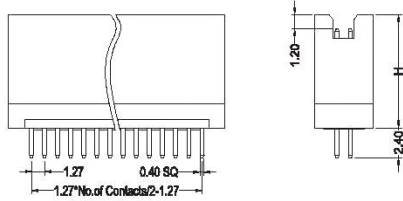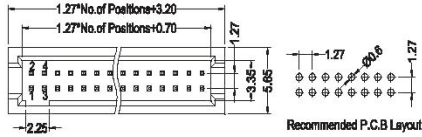

Total Hight Code:	DIM H
TA	8.95
TB	9.35
TC	9.55
TG	10.35
TH	10.65
TJ	10.95
TK	11.15
TM	11.45
TQ	12.15
TS	14.05
TU	15.15
TV	15.55
TY	17.25

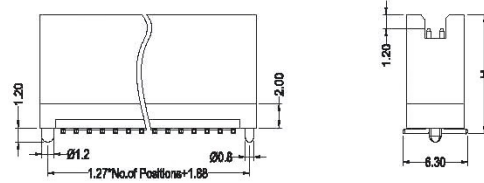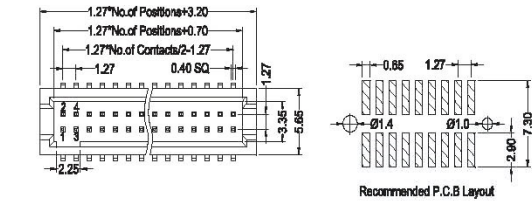

Total Hight Code:	DIM H
TD	9.50
TE	9.90
TF	10.10
TI	10.90
TL	11.20
TN	11.50
TO	11.70
TP	12.00
TR	12.70
TT	14.60
TW	15.70
TX	16.10
TZ	17.80

B 1 2 7 - 2 9

X

XX

XX

X

X

1

Contact Shape:
P: Straight
S: SMT

No. Of Pins
04~100P

Contact Plating
Full Of Gold
C0=0.8u"

~
C9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Colour
B: Black
G: Grey

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray