1.27*2.54mm Box Header

Specifications

備注(Remark)
1.材料(Material)
膠芯:PA9T/LCP+30%G.F UL94V-0,顏色:黑色
Housing:PA9T/LCP+30%G.F UL94V-0,Color:Black
端子:黃銅
Contact: Brass
2.特性(characteristics):
額定電流:1.00AMP
Rating Current:1.00AMP
接觸阻抗:20mΩ Max
Contact Resistance:20mΩ Max
絕緣阻抗:1000MΩ Min
Insulating Resistance:1000 MΩ Min
耐電壓: AC 500V/分钟
Withstanding Voltage:AC 500V/Minute
溫度範圍: -40° C to+105° C
Temperture Range: -40° C to+105° C



B127X254-22PXXXXXX1



B127X254-22RXXXXXX1



B127X254-22SXXXXXX1

Mating With/配對母座:

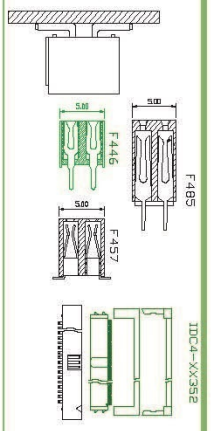

B BOX HEADER





















B127X254-22 | X | XX | XX | X | X | 1

Contact Shape:
P:Straight
R:Right Angle
S:SMT

No.Of Pins
04~100P

Contact Plating
Full Of Gold
G0=0.8u"
~
G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Insulator Colour
B:Black
G:Grey

Packing
A:PE Bag
R:Tape & Reel
T:Tube
D:Tube+CAP
E:Tray