

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G.F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.00AMP

Rating Current: 2.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分鐘


Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C



B200-26PXXXXX1







B200-26SXXXXX1







B200-26SXXXXX2


Mating With/配對母座:

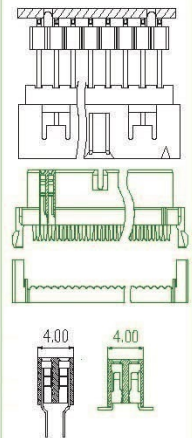

Recommended P.C.B Layout



TYPE 1



TYPE 2

Users can customize
此高度可定制

Dimension antitheses list		
ITEM	A	C
Standard	2.5	
Alternate		

Dimension antitheses list		
ITEM	W	C
Standard	8.5	
Alternate		

B 200 - 26

X

XX

XX

X

X

X

Contact Shape:

P: Straight
S: SMT

No. Of Pins

06~64P

Contact Plating

Full Of Gold

G0=0.8u"

~

G9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Insulator Colour

B: Black

G: Grey

Packing

A: PE Bag

R: Tape & Reel

T: Tube

D: Tube+CAP

E: Tray

Journal Number

1: Type1 (without Post)

2: Type2 (with Post)