

### Specifications

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0


Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

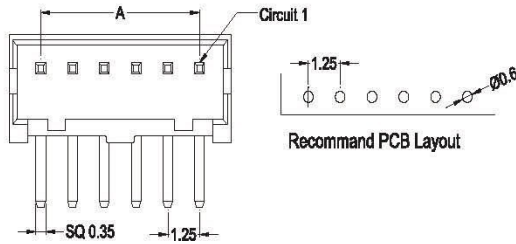

KWC1250-PR-XX

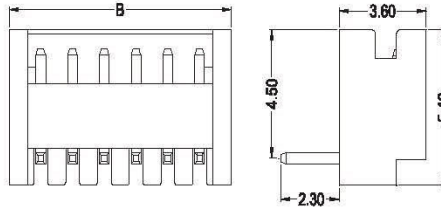

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	1.25	3.75	9	10.00	12.50
3	2.50	5.00	10	11.25	13.75
4	3.75	6.25	11	12.50	15.00
5	5.00	7.50	12	13.75	16.25
6	6.25	8.75	13	15.00	17.50
7	7.50	10.00	14	16.25	18.75
8	8.75	11.25	15	17.50	20.00

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0


Housing: PA66 UL94V-0

端子: 黃銅


Contact: Brass

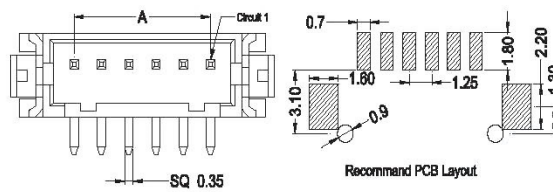

Poles	Dimensions (mm)		
	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50



KWC1250-PR1-XX

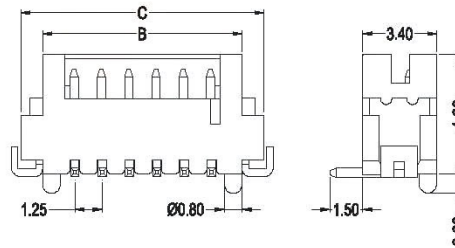

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA6T UL94V-0

Housing: PA6T UL94V-0

端子: 黃銅

Contact: Brass

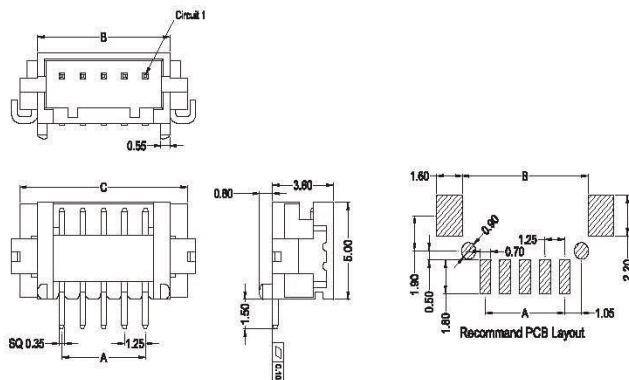

Poles	Dimensions (mm)		
	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50



KWC1250-SR-XX