

### Specifications

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0


Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

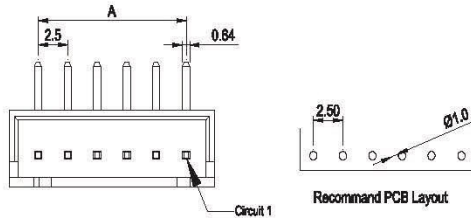

WTB2500-PR3-XX

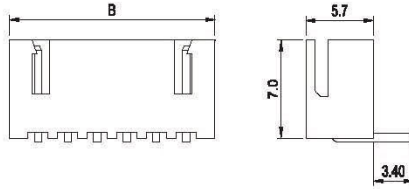

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00	17	40.00	45.00
08	17.50	22.50	18	42.50	47.50
09	20.00	25.00	19	45.00	50.00
10	22.50	27.50	20	47.50	52.50
11	25.00	30.00			

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA9T UL94V-0

Housing: PA9T UL94V-0

端子: 黃銅

Contact: Brass

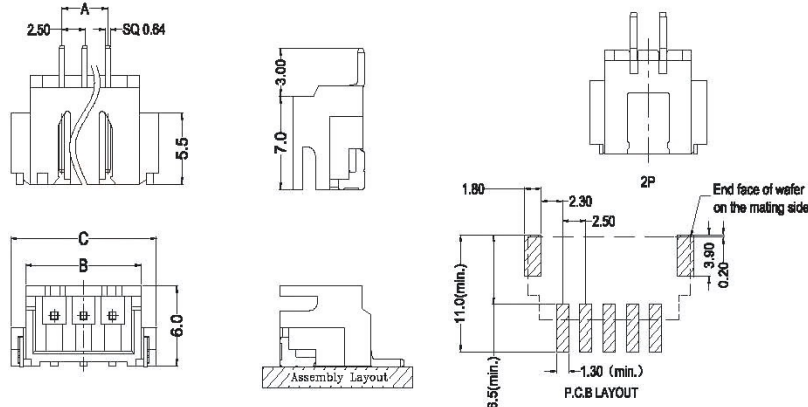

WTB2500-SR1-XX

Poles	Dimensions (mm)		
	A	B	C
02	2.50	7.45	10.00
03	5.00	9.95	12.50
04	7.50	12.45	15.00
05	10.00	14.95	17.50
06	12.50	17.45	20.00
07	15.00	19.95	22.50
08	17.50	22.45	25.00
09	20.00	24.95	27.50
10	22.50	27.45	30.00
11	25.00	29.95	32.50
12	27.50	32.45	35.00
13	30.00	34.95	37.50
14	32.50	37.45	40.00
15	35.00	39.95	42.50
16	37.50	42.45	45.00

W

WAFER

### Specifications

#### Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

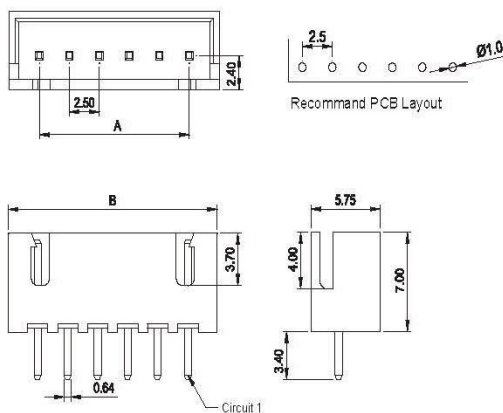

WTB2500-PV2-XX

Poles	Dimensions (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50