

Specifications

Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0


Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass



WT2540-PV3-XX

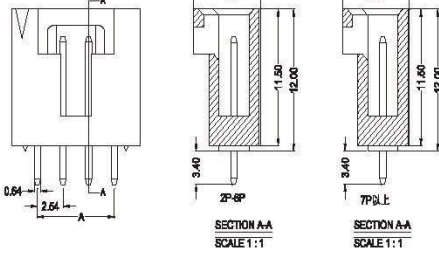

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	2.54	7.62	14	33.02	38.10
3	5.08	10.16	15	35.56	40.64
4	7.62	12.70	16	38.10	43.18
5	10.16	15.24	17	40.64	45.72
6	12.70	17.78	18	43.18	48.26
7	15.24	20.32	19	45.72	50.80
8	17.78	22.86	20	48.26	53.34
9	20.32	25.40	21	50.80	55.88
10	22.86	27.94	22	53.34	58.42
11	25.40	30.48	23	55.88	60.96
12	27.94	33.02	24	58.42	63.50
13	30.48	35.56			


Housing

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0

Housing: PA66 UL94V-0



WTH2540-PV3-XX



Poles	Dimensions (mm)		
	A	B	C
2	2.54	5.08	-
3	5.08	7.62	2.54
4	7.62	10.16	5.08
5	10.16	12.70	7.62
6	12.70	15.24	10.16
7	15.24	17.78	12.70
8	17.78	20.32	15.24
9	20.32	22.86	17.78
10	22.86	25.40	20.32
11	25.40	27.94	22.86
12	27.94	30.48	25.40
13	30.48	33.02	27.94
14	33.02	35.56	30.48
15	33.02	38.10	33.02

W

WAFER

Wafer

備注 (Remark)


1. 材料 (Material)

膠芯: PA66 UL94V-0


Housing: PA66 UL94V-0

端子: 黃銅

Contact: Brass

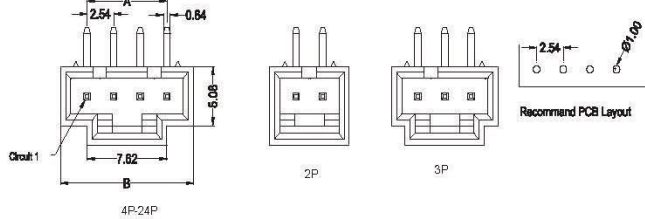

WT2540-PR1-XX

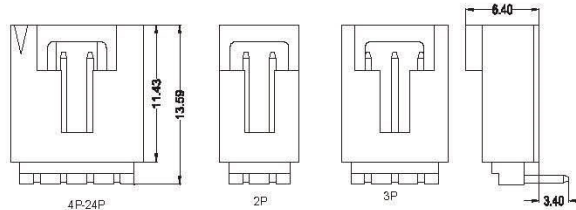

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	2.54	7.62	14	33.02	38.10
3	5.08	10.16	15	35.56	40.64
4	7.62	12.70	16	38.10	43.18
5	10.16	15.24	17	40.64	45.72
6	12.70	17.78	18	43.18	48.26
7	15.24	20.32	19	45.72	50.80
8	17.78	22.86	20	48.26	53.34
9	20.32	25.40	21	50.80	55.88
10	22.86	27.94	22	53.34	58.42
11	25.40	30.48	23	55.88	60.96
12	27.94	33.02	24	58.42	63.50
13	30.48	35.56			